



Lindy 2m USB 2.0 Type A to A Cable, Anthra Line

Brand : Lindy

Product code: 36693

Product name : 2m USB 2.0 Type A to A Cable, Anthra Line

- Professional choice USB 2.0 Type A to A cable for commercial and high performance AV and IT installations
 - Supports data transfer speeds up to 480Mbps
 - Robust PVC housing, nickel connectors and gold plated contacts
 - Double shielded cable, corrosion resistant tinned copper conductors
 - USB 2.0, 480Mbps; 10 year warranty
- 2m USB 2.0 Type A to A Cable, Anthra Line

Lindy 2m USB 2.0 Type A to A Cable, Anthra Line:

From the Lines cable connectivity concept developed by Lindy, Anthra Line USB 2.0 Type A to A cables are the professional choice for high performance connections in commercial AV and IT installations.


Anthra Line USB 2.0 cables are premium connections that feature double shielded construction with copper conductors for performance and corrosion resistance. High quality gold plated contacts and nickel connectors maintain signal integrity and reliability.

Data transfer speeds up to 480Mbps are supported for the quick and effortless transfer of large data volumes.

Anthra Line USB 2.0 Type A cables are available in lengths from 0.2m to 5m.



Features		Features	
USB version *	USB 2.0	Nominal attenuation	5.8db/km
Connector 1 *	USB A	Weight & dimensions	
Connector 2 *	USB A	Cable length *	2 m
Connector 1 gender *	Male	Cable diameter	4.4 mm
Connector 2 gender *	Male	Bend radius (min)	1.6 cm
Connector 1 form factor	Straight	Connector 1 dimensions (WxDxH)	15.5 x 35 x 7.8 mm
Connector 2 form factor	Straight	Connector 2 dimensions (WxDxH)	15.5 x 35 x 7.8 mm
AWG wire size	26/28	Packaging data	
Connector material	Nickel	Package type	Polybag
Contact material	Copper	Packaging content	
Connector contacts plating	Gold	Quantity per pack *	1 pc(s)
Cable jacket material	Polyvinyl chloride (PVC)	Operational conditions	
Conductor material	Tinned copper	Operating temperature (T-T)	0 - 60 °C
Connector shielding	✓	Storage temperature (T-T)	0 - 60 °C
Connector shield material	Aluminium	Certificates	
Connector housing material	Polyvinyl chloride (PVC)	Certification	RoHS, REACH, UL
Maximum data transfer rate	480 Mbit/s	Logistics data	
Maximum data transfer rate	0.48 Gbit/s	Harmonized System (HS) code	84733080
Product colour *	Black, Green, Red		
Cable type	Round cable		

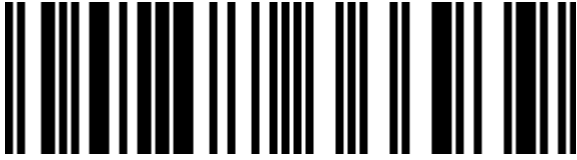

4002888366939

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 08-JAN-2025. Prints or copies of Information are only valid on the printed Publication date